

LED Current Selection


Note: Please specify the output current when make orders.
 If you need to change the output current in special cases, please open the housing in outages and select the current by built-in DIP switch on the PCB.



DIP Switch		↓ ↓ ↑	↓ ↑ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ↓ ON OFF
AD-10-100-400-F1P1	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	
	Output Voltage	10-45V	10-45V	10-45V	10-40V	10-33V	10-28V	10-25V	
	Output Power	1-4.5W	1.5-6.75W	2-9W	2.5-10W	3-9.9W	3.5-9.8W	4-10W	


DIP Switch		↓ ↓ ↓	↓ ↓ ↑	↓ ↑ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ↓ ON OFF
AD-10-350-700-F1P1	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	3-24V	3-24V	3-22V	3-20V	3-18V	3-16V	3-15V	3-14V	
	Output Power	1.05-8.4W	1.2-9.6W	1.35-9.9W	1.5-10W	1.65-9.9W	1.8-9.6W	1.95-9.75W	2.1-9.8W	

Wiring Diagram

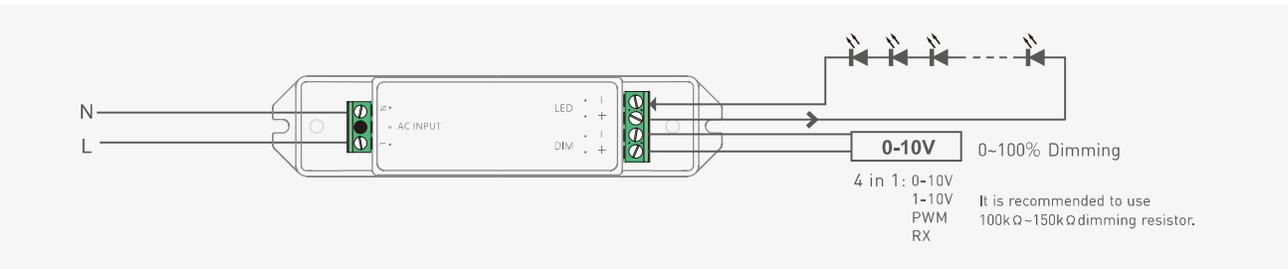

Dimensions

Unit : mm

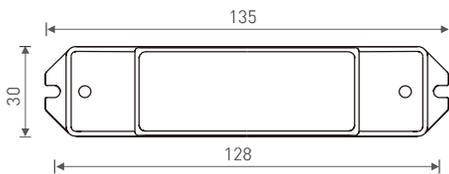

* No further notice if any changes in the manual.
 Product function depends on the goods.
 Please feel free to contact your supplier if any question.