LTECH DIM

2 4G LED Dimming Controller

FC CE RoHS warranty 5 years ISO9001:2008

Main Characteristics

V5 RF Dimming Remote Control

Remote Option:	Dimming, 4 Zones control
Working Voltage:	3Vdc (Battery CR2032)
Wireless Frequency:	2.4GHz
Working Temperature:	-30℃~55℃
Package Size:	L150×W46×H18(mm)
Weight(G.W.):	85g

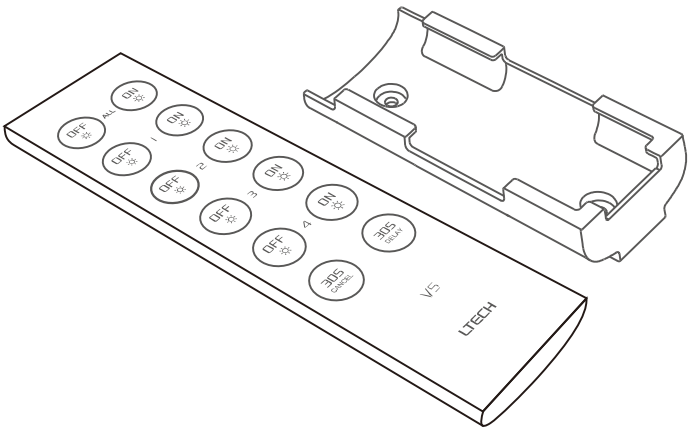

V5

R4-5A CV Receiver

Input Voltage:	5~24Vdc
Max Current Load:	5A × 4CH Max. 20A
Max Output Power:	100W/240W/480W(5V/12V/24V)
Working Temperature:	-30℃~55℃
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	150g

R4-CC CC Receiver

Input Voltage:	12~48Vdc
Output Voltage:	3~46Vdc
Output Current:	CC 350/700/1050mA×4CH
Output Power:	1.05W~48.3W×4CH Max 193.2W
Working Temperature:	-30℃~55℃
Package Size:	L178×W48×H33(mm)
Weight(G.W.):	165g

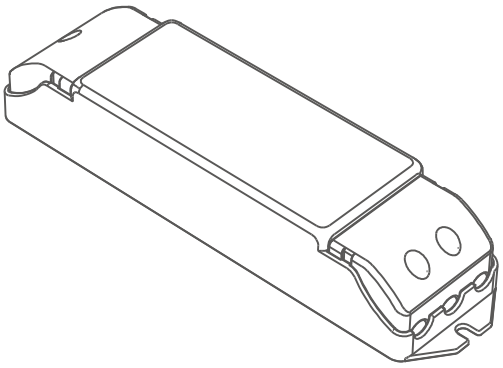

R4-5A/R4-CC

Note: Receiver is sold separately.

Dimensions

Unit: mm

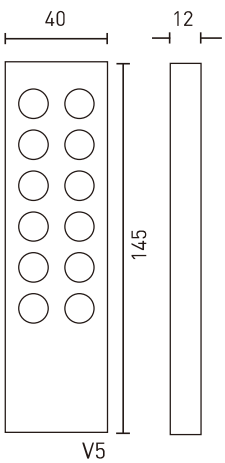

V5



Holder

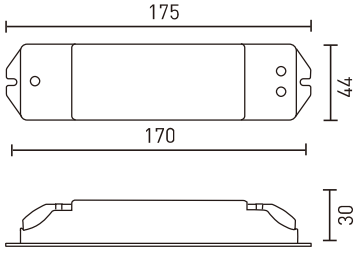

R4-5A/R4-CC

Operating Instruction for Remote:

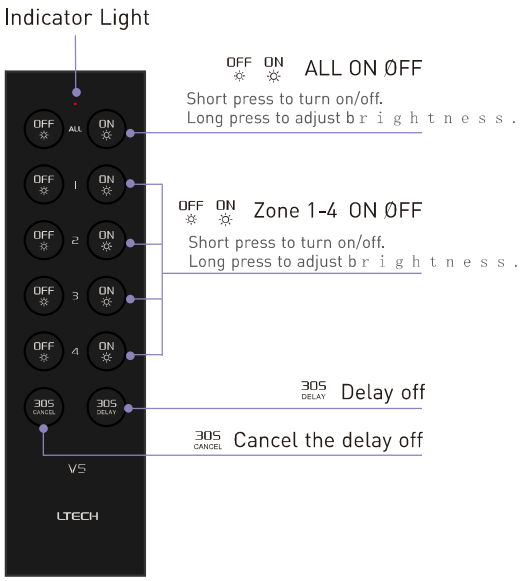

Operating Instruction for Receiver:

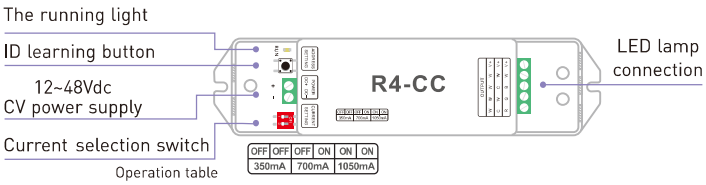

Match/Clear code between remotes

Match code:

1. Assuming that B match up with A.
2. Press the bottom two keys of B simultaneously until the indicator light keeps on .
3. Then press any key on A in 5 seconds. When the indicator light of B turns off, match successfully.

Clear code:

Press the bottom two keys of B simultaneously (about 6 seconds), the indicator light keeps on, deactivated matching successfully.

Match/Clear code between remote and receiver

Match code:

1. Short press the ID learning button on the receiver, the running light keeps on.
2. Press the matching zone key "ON" or "OFF" on the remote, the running light on the receiver flicker several times, match successfully.

Clear code:

Long press "ID learning button" on receiver for 5 seconds, If the running light flicker several times, deactivate the matching successfully.

Wiring Diagram :

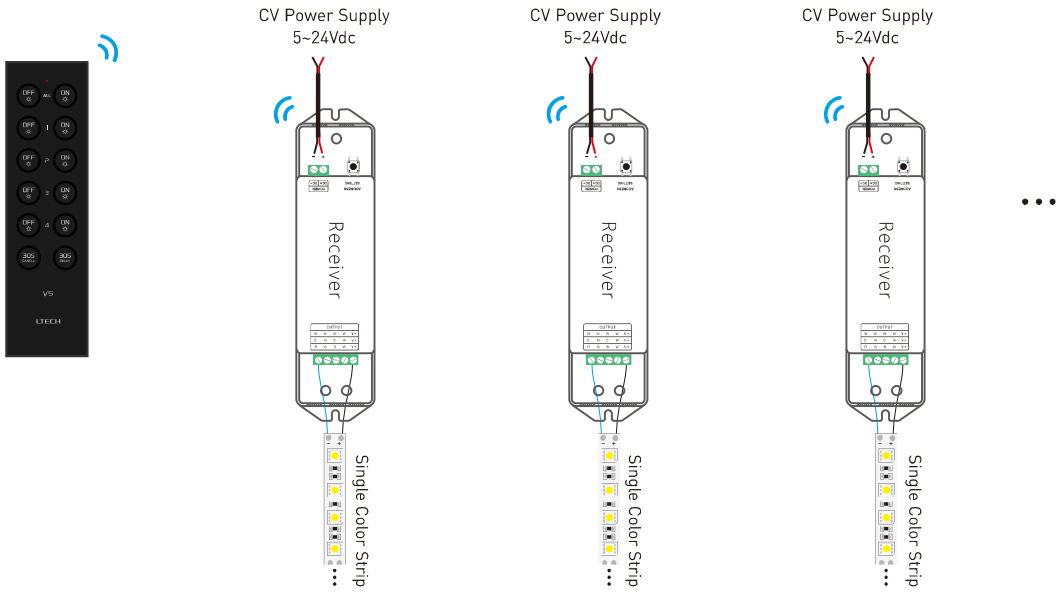

Attention:

- Please replace the battery if the remote becomes insensitive or control distance is shortened.
- Please take out the battery for long time unused.