


2.4G LED RGB Controller

Main Characteristics

V7 RF RGB Remote Control

- Remote Option: RGB, 4 zones control
- Working Voltage: 3Vdc (Battery CR2032)
- Wireless Signal: RF 2.4GHz
- Working Temperature: -30°C~55°C
- Package Size: L150×W46×H18(mm)
- Weight(G.W.): 85g

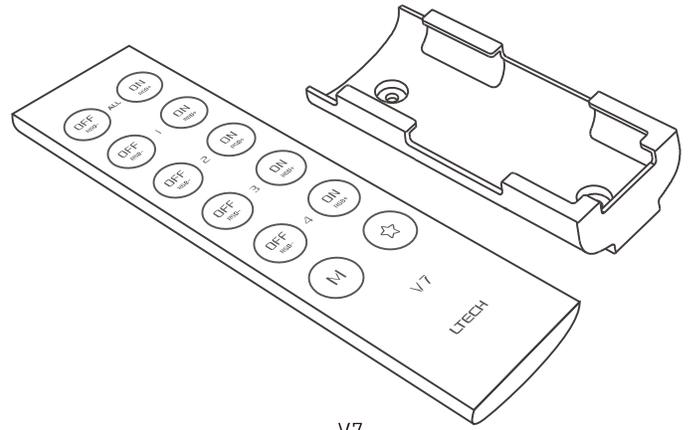


V7

R4-5A CV Receiver

- Input Voltage: 5~24Vdc
- Max Current Load: 5A × 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 150g

R4-CC CC Receiver

- Input Voltage: 12~48Vdc
- Output Voltage: 3~46Vdc
- Output Current: CC 350/700/1050mA×4CH
- Output Power: 1.05W~48.3W×4CH Max 193.2W
- Working Temperature: -30°C~55°C
- Package Size: L178×W48×H33(mm)
- Weight(G.W.): 165g

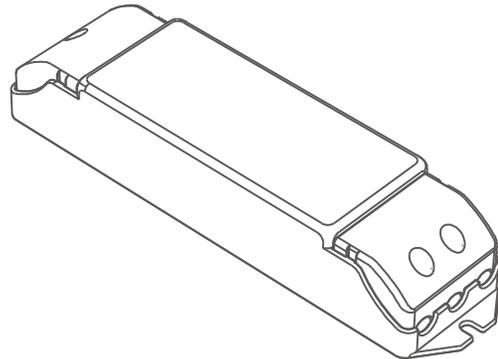


R4-5A/R4-CC


Note: Receiver is sold separately.

Dimensions


Unit: mm

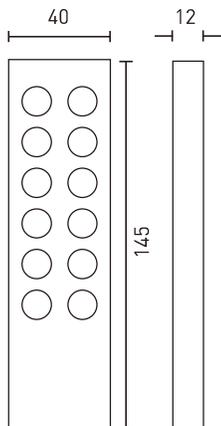

V7




Holder

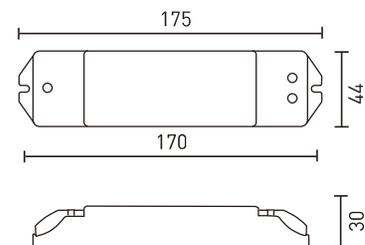


R4-5A/R4-CC

## Operating Instruction for Remote:

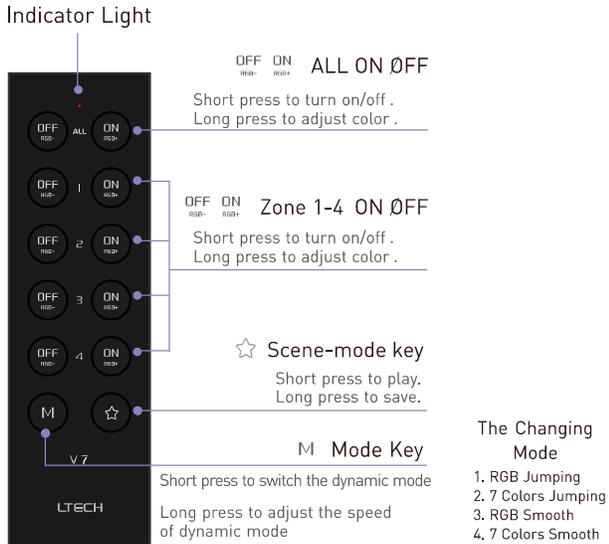


### Match/Clear code between remotes

#### Match code:

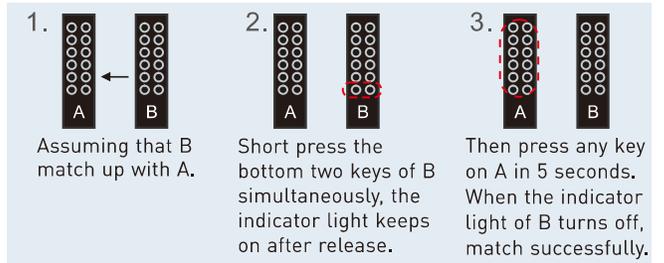


#### Clear code:

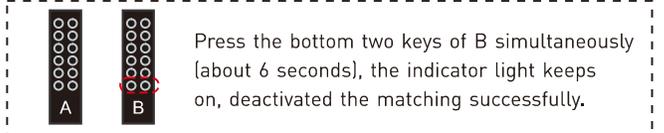


### Match/Clear code between remote and receiver


#### Match code:

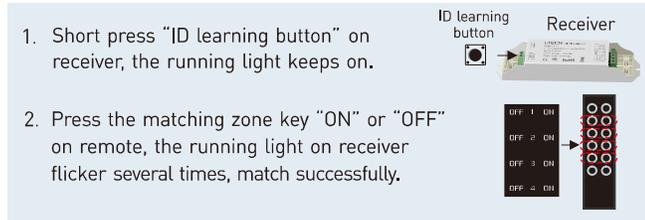

#### Clear code:

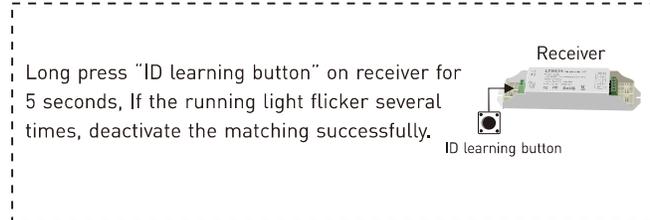

## Wiring Diagram :

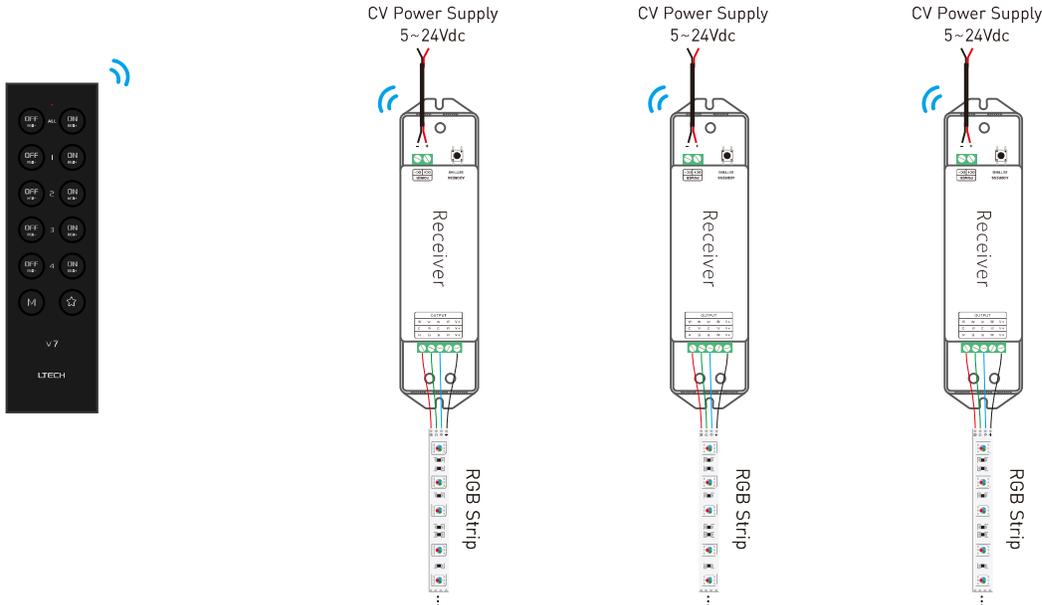

## Attention:

- Please replace battery if the remote becomes insensitive or control distance is shortened.
- Please take out battery for long time unused.