

LED Intelligent Dimming Driver

36W 3A 12V DC

- Dimming interface: DMX512/RDM, Push DIM.
- With the RDM remote device management protocol.
- Supports DMX512 signal bi-directional communication.
- PWM digital dimming, no alter LED color rendering index.
- 60000:1 wide dimming, range: 0-100%, LED start at 0.1% possible.
- Power factor > 0.99, efficiency > 84%.
- Short circuit / Over-temperature / Over load protection.
- Class 2 power supply. Full protective plastic housing.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor environments.



SELV        **CE** **RoHS**  



Main Characteristics

Dimming Interface:	DMX512/RDM, Push DIM	Output Power:	Max. 36W
Dimming Range:	0-100%, LED start at 0.1% possible.	Line Regulation:	±1%
Input Voltage Range:	100-240Vac ±10%	Load Regulation:	±2%
Input Current:	115Vac ≤ 0.6A, 230Vac ≤ 0.3A	Overload Power Limitation:	0.95-1.20
Power Factor:	PF > 0.99/115Vac, PF > 0.95/230Vac, at full load	Working Temperature:	-30 ~ +55°C
Frequency:	50/60Hz	Working Humidity:	20 ~ 95%RH, non-condensing
Efficiency:	≥ 84%	Storage Temp., Humidity:	-23 ~ +80°C, 10-95%RH
Inrush Current(typ.):	Cold start 10A at 230Vac (twidth=75µs measured at 50% Ipeak)	Temp. Coefficient:	±0.03%/°C(0-50°C)
Leakage Current:	<0.5mA/230Vac	Vibration:	10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes
Output Current:	Max. 3A		
Operating Voltage:	12V DC ± 0.5V DC		

Protection

Short Circuit / Over Temperature / Over Load: Auto recovery



Others

Dimension:	107×89×58mm(L×W×H)
Packing:	109×99×63mm(L×W×H)
Weight(G.W.):	280g±10g


Safety & EMC

Withstand Voltage:	I/P-O/P: 3750Vac
Isolation Resistance:	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
Safety Specification:	IEC/EN61347-1, IEC/EN61347-2-13, EN55015, EN61000-3-2 Class C, EN61000-3-3, EN55024, EN61547 EN61000-4-2,3,4,5,6,8,11.

Dimensions



Din rail mounting size:
TS-35/7.5 or TS-35/15

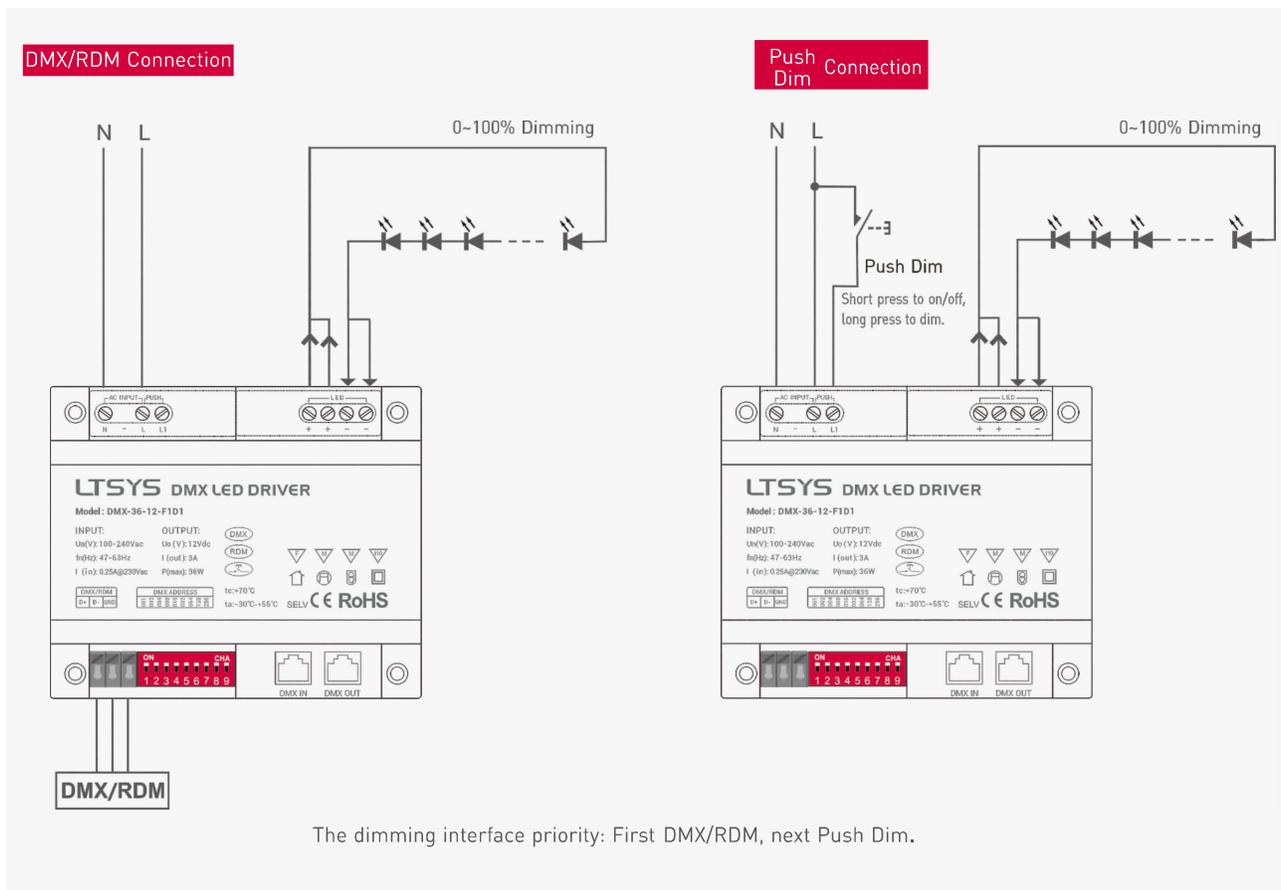

Push Dimming



Reset Switch

- On/off control: Short press.
- Stepless dimming: Long press.
- For fine tuning of light level: with every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

Attention:

- The product shall be installed and serviced by the qualified person.
- Before use, please make sure the LED driver output voltage matches with the LED lights. improper voltage will damage the LED lights or influence the luminous efficiency.
- Good heat dissipation can prolong the life of the LED driver. Please try to install the LED driver on the metal surface and use in well-ventilated environment.
- The wire size shall be big enough to load the power with solid connection to LED driver.
- If a malfunction occurs, do not repair by yourself. For any question, please contact the supplier directly.

RDM Mode: The dip switch 1-9 are OFF .



DMX Address Setting:

E.g.1: Set Initial Address To 32.



E.g.2: Set Initial Address To 37.



$$001+004+032=37$$

DMX address value=the total value of [1-9].

To get the place value when in "on" position.