


Intelligent LED Driver (Constant Current)

- The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- Small size and light weight. The clamshell design and screwless type for strain-relief.
- Support Leading edge(Triac), Trailing edge(ELV).
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- T-PWM™ dimming technology allows continuous and flicker-free images under high-speed photography.
- Dimming from 0-100%, down to 0.1%.
- The whole dimming process is flicker-free with high frequency exemption level.
- Multiple current levels and wide voltage range. Suitable for different power of LEDs.
- Class 2 LED driver, Safety Extra Low Voltage (SELV).
- Innovative thermal management technology intelligently protects the life of the LED driver.
- Overheat, overload, short circuit protection and automatic recovery.
- Suitable for Class I / II / III indoor light fixtures.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).

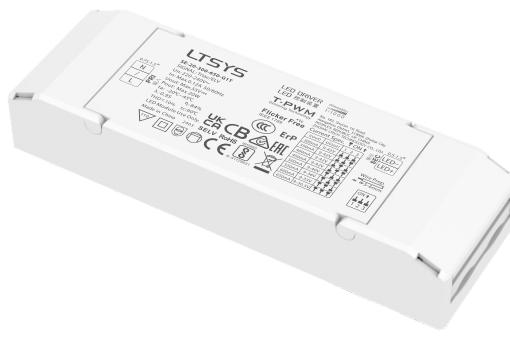

T-PWM
Dimming Technology

Flicker Free
IEEE 1789


Dimmable:
1:1000



Technical Specs

Model	SE-20-300-650-G1T	
Features	Output Type	Constant Current
	Dimming Interface	Triac/ELV
	Output Feature	Isolation
	Protection Grade	IP20
	Insulation Grade	Class II (Suitable for class I / II / III light fixtures)
OUTPUT	Output Voltage	9-42Vdc
	Maximum output voltage	≤55V
	Output Current Range	300-650mA
	Output Power Range	2.7W-20W
	Dimming Range	0-100%, down to 0.1%
	Ripple Current	Max.5.0%@Rated current
	Current Accuracy	±5%
INPUT	PWM Frequency	3600Hz
	DC Voltage Range	200-280Vdc
	Input Voltage	220-240Vac
	Frequency	50/60Hz
	Input Current	≤0.12A/230Vac
	Power transmission	Max.25W
	Power Factor	PF>0.95/230Vac , at full load
	THD	THD<10%/230Vac , at full load
	Efficiency (Typ.)	>84%@500mA
	Inrush Current	Cold start 13A[Test width=120us tested under 50% Ipeak]/230Vac
ENVIRONMENT	Anti Surge	L-N: 2kV
	Leakage Current	<0.5mA/230Vac
	Working Temperature	ta: -20 ~ 45°C tc: 90°C
	Working Humidity	20 ~ 95%RH, non-condensing
	Storage Temperature/Humidity	-40 ~ 80°C, 10 ~ 95%RH
PROTECTION	Temperature Coefficient	±0.03%/C (-20°C ~ 45°C)
	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively
	Overload Protection	Shut down the output and recover automatically once it exceeds 1.02-1.35 times of the rated power
SAFETY & EMC	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output
	Short Circuit Protection	When short circuit occurs, shut down the output and recover automatically
	Withstand Voltage	I/P-0/P: 3750Vac
SAFETY & EMC	Insulation Resistance	I/P-0/P: 100MΩ/500VDC/25°C/70%RH
	Safety Standards	CCC China GB19510.1, GB19510.14
		TUV Germany EN61347-1, EN61347-2-13, EN62493
		CE European Union EN61347-1, EN61347-2-13, EN62384
		RCM Australia AS61347-1, AS61347-2-13
		ENEC Europe EN61347-1, EN61347-2-13, EN62384
		CB CB Member States IEC61347-1, IEC61347-2-13
	EMC Emission	EAC Russia IEC61347-1, IEC61347-2-13
		BIS India IS 15885(PART 2/SEC 13)
		CCC China GB/T17743, GB17625.1
		CE European Union EN55015, EN61000-3-2, EN61000-3-3, EN61547
ErP	RCM Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547
	EAC Russia	IEC 62493 IEC 61547 EH 55015 IEC 61000-3-2, IEC 61000-3-3
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547
	Power Consumption	Standby power consumption Networked standby
	No-load power consumption	No networked standby mode (No Phase-cut signal, no power consumption) Without no-load mode
OTHERS	Flicker/Stroboscopic Effect	IEEE 1789 CIE SVM Pst LM≤1.0, SVM≤0.4
	DF	Phase factor DF≥0.9
	Weight(N.W.)	110g
	Dimensions	127×40×23mm(L×W×H)

LED Current Selection





SE-20-300-650-G1T	DIP Switch	1	2	3	1	2	3	1	2	3	1	2	3	
	ON													
	OFF													
	Output Current	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA					
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-36V	9-33V	9-30.5V					
	Output Power	2.7-12.6W	3.15-14.7W	3.6-16.8W	4.05-18.9W	4.5-20W	4.95-19.8W	5.4-19.8W	5.85-19.82W					

* After setting the current via DIP switches, power off and then power on the driver to make the new current setting effective.

* E.g. LED 3V/pcs: 9-42V can power 3-14pcs LEDs in series, 9-21.5V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LEDs.


Product Size

Unit: mm

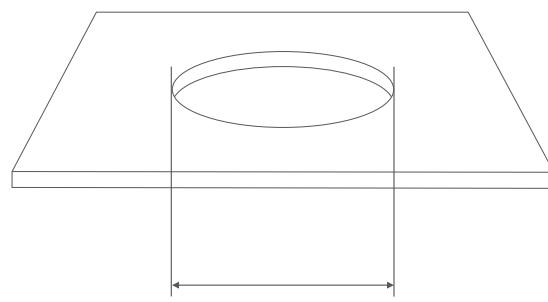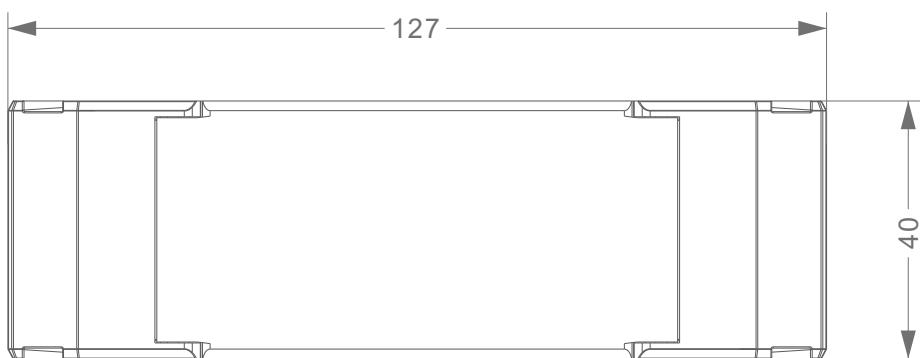


Minimum hole size: φ48mm (1.89")

Wiring Diagram

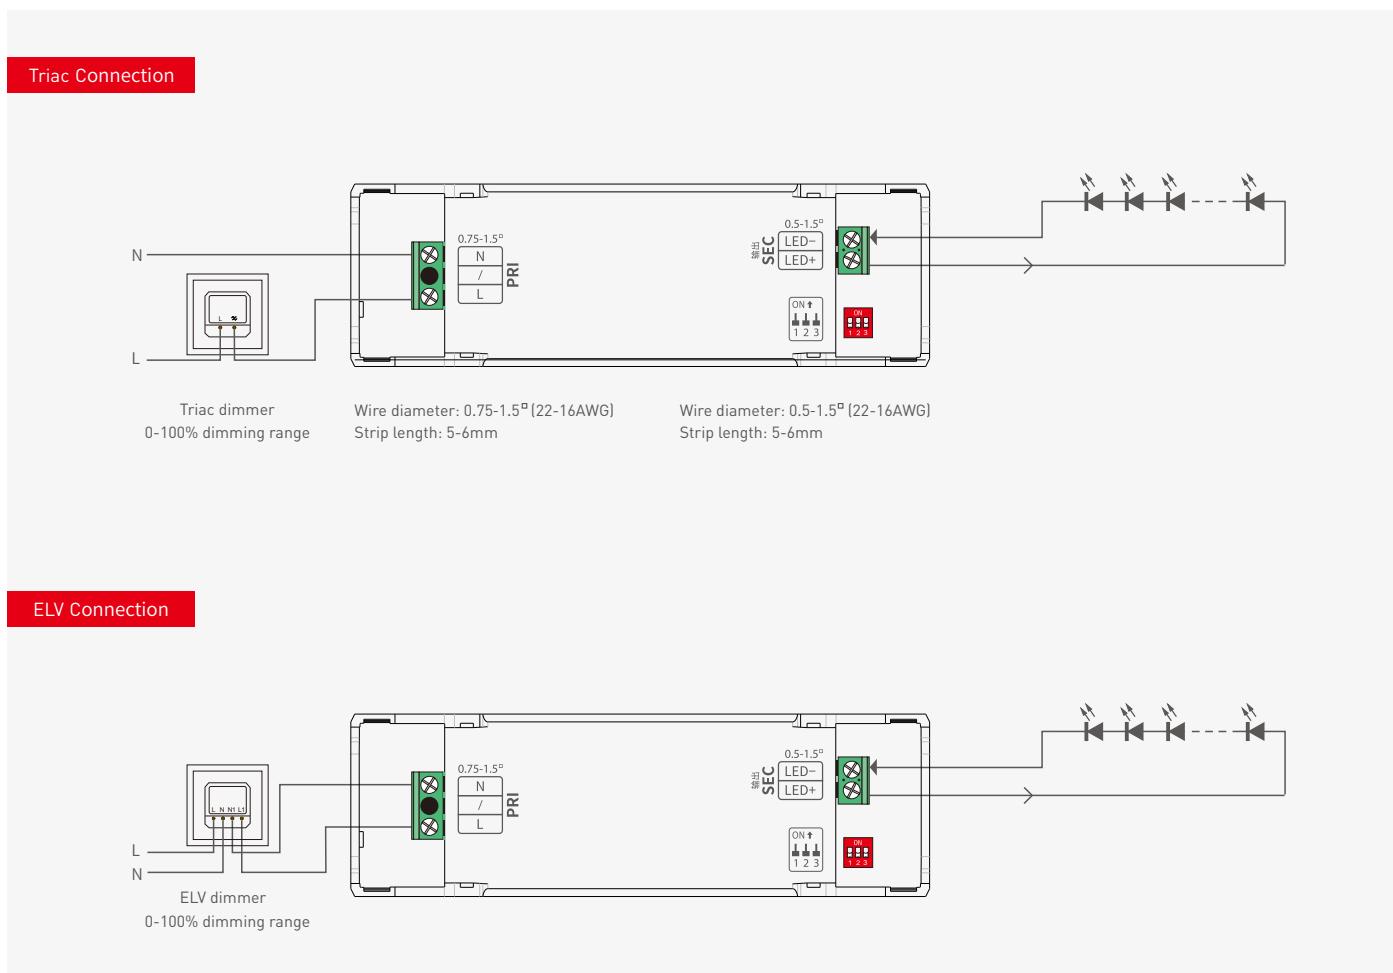


Protective Housing Application Diagram

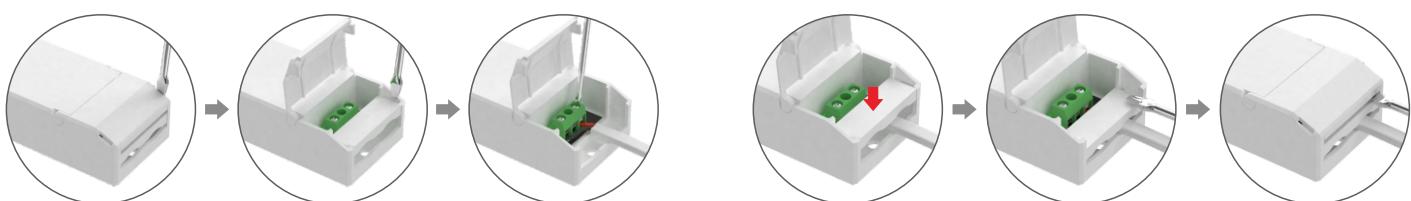


1. Put the head of a screwdriver on the side of the housing to pry up both the protective cover and wire fixing board. Then remove the wire fixing board and connect to the wires as wiring diagram shows.

2. Install the wire fixing board and press it down. Then snap on the protective cover while pressing the wire fixing board with a small flat-head screwdriver

Installation Precautions







Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.



Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.

Relationship Diagrams

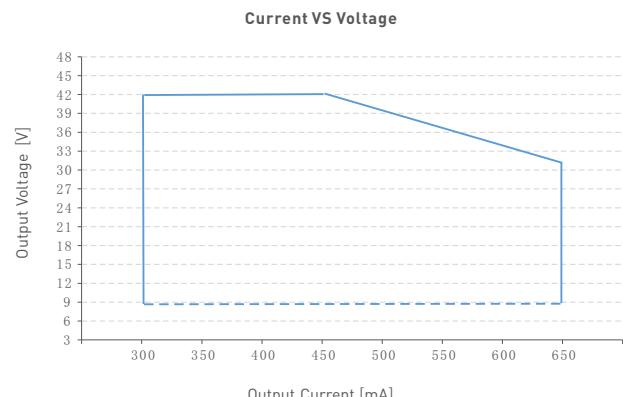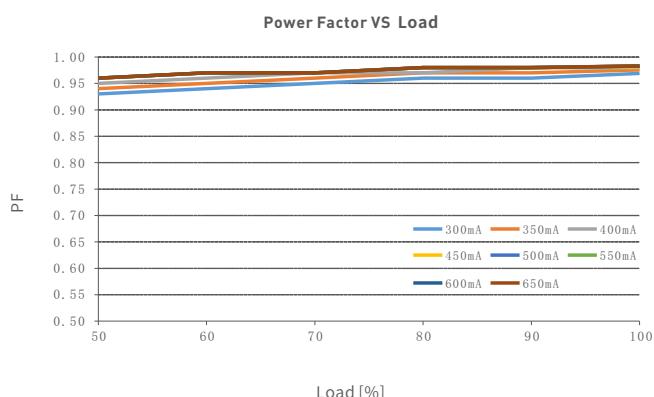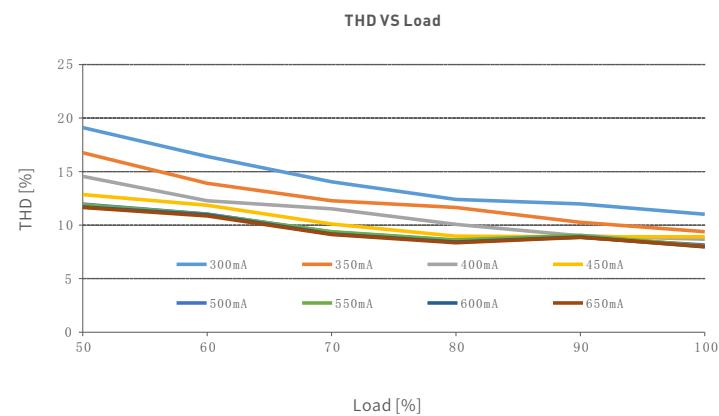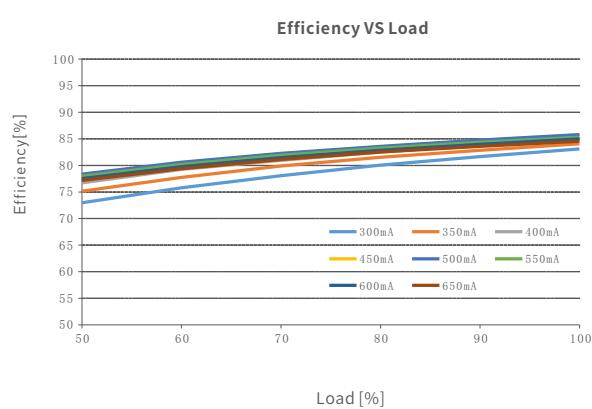

SE-20-300-650-G1T


Flicker Test Form

IEEE 1789

Limit of Modulation in low risk area	
Waveform frequency of optical output	Limit (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of modulation in no effect area	
Waveform frequency of optical output	Limit (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment [High frequency exemption]

Brightness

- ▲ 0.1%
- ◆ 1%
- ▲ 5%
- ◆ 10%
- ◆ 20%
- ◆ 30%
- ◆ 40%
- ◆ 50%
- ◆ 60%
- ◆ 70%
- ◆ 80%
- ◆ 90%
- ◆ 100%

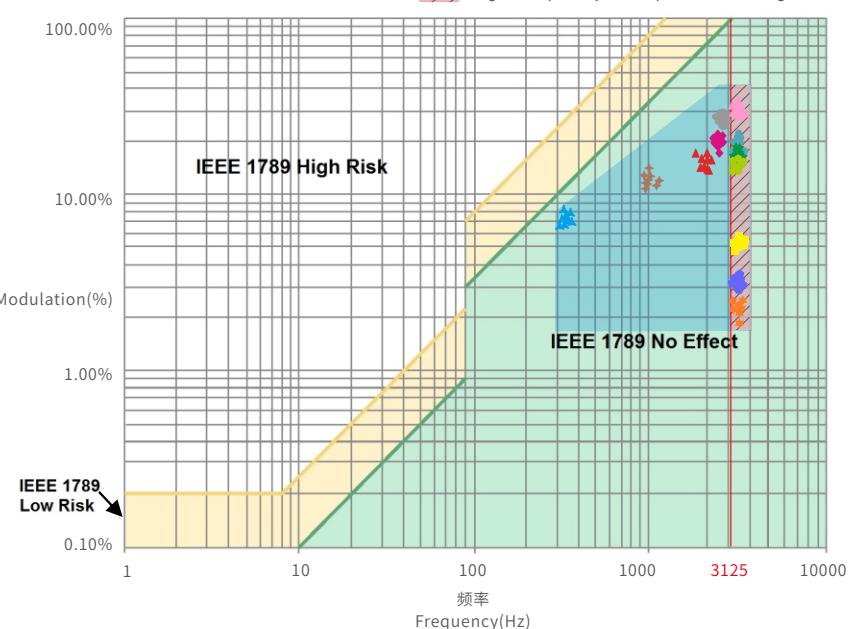

Marks in the right chart were tested results of different current ranges.

The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Packaging Specifications

Model	SE-20-300-650-G1T
Carton Dimensions	290×275×106mm(L×W×H)
Quantity	20 PCS/Layer; 2 Layers/Carton; 40 PCS/Carton
Weight	0.11kg/PC; 5.2kg±5%/Carton

Packaging Image



Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- This product must be installed and adjusted by a qualified professional.
- This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the life of the product. Please install the product in an environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from an intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger an accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2022.11.09	Original version	Yang Weiling
A1	2022.11.25	P1 Technical parameters Add Max.25W transmission power	Yang Weiling
A2	2025.08.04	更新logo, 修改调光深度	黎海鹏