

Intelligent Tunable White LED Driver (Constant Voltage)

- Small size and light weight. Adopt SAMSUNG/COVESTRO V0 flame resistant polycarbonate protective housings.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Adopt constant power program design and it keeps the same brightness in color temperature adjustment.
- Color temperature range: 2700-6500K.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- The whole dimming process is flicker-free with high frequency exemption level.
- Dimming from 0-100%, down to 0.1%.
- 2-CH SELV output channel with common anode.
- Support RDM remote device management protocol.
- The secure and reliable design for signal isolation.
- Innovative thermal management technology intelligently protects the power life.
- Overheat, over voltage, overload, short circuit protection and automatic recovery.
- Suitable for indoor light applications of I/II/III type.
- Up to 50,000-hour life time.
- 5-year warranty [Rubycon capacitor].



Flicker-free
IEEE 1789

Dimmable:
0.1%-100%



Use only within an enclosure.



RoHS

SELV

Class 2





Technical Specs

Model	LM-60-24-U2M2	LM-60-12-U2M2		
OUTPUT	Output Voltage	24Vdc	12Vdc	
	Output Voltage Range	24Vdc±0.5Vdc	12Vdc±0.5Vdc	
	Output Current	Max. 2.5A	Max. 5A	
	Output Power	Max. 60W		
	Output Power Range	0-60W		
	Strobe Level	High frequency exemption level		
	PWM Frequency	3600Hz		
	Dimming Range	0-100%, down to 0.1%		
	Overload Power Limitation	>102%		
	Ripple & Noise	Switch ripple<100mV, noise<200mV	Switch ripple<200mV, noise<400mV	
INPUT	Dimming Interface	DMX/RDM, Push DIM/CCT		
	Input Voltage	120-277Vac		
	Frequency	50/60Hz		
	Input Current	0.6A/120Vac, 0.35A/230Vac, 0.3A/277Vac		
	Power Factor	PF>0.99/120Vac, PF>0.95/230Vac, PF>0.9/277Vac (at full load)		
	THD	120Vac@THD < 5%, 230Vac@THD < 7%, 277Vac@THD < 10% (at full load)		
	Efficiency [typ.]	91%	90%	
	Standby Power Loss	<0.5W		
	Inrush Current	Cold start 45A/230Vac (Test twidth = 840us under 50% Ipeak)		
	Anti Surge	L-N: 2KV		
	Leakage Current	Max. 0.5mA		
ENVIRONMENT	Working Temperature	ta: -20-50°C tc: 85°C		
	Working Humidity	20-95%RH, non-condensing		
	Storage Temperature, Humidity	-40-80°C, 10-95%RH		
	Temperature Coefficient	±0.03%/°C(-20-50°C)		
	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overheat Protection	Intelligently adjust or turn off the output current if the PCB temperature >110°C, and recover automatically		
	Overvoltage Protection	Shut down the output when non-load voltage>28V, and recover automatically	Shut down the output when non-load voltage>14V, and recover automatically	
	Overload Protection	Shut down the output when current load>102%, and recover automatically		
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically		
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac		
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	UL	America	UL8750
		CUL	Canada	CSA C22.2 NO. 250. 13
		CE	European Union	EN61347-1, EN61347-2-13, EN62384
	EMC Emission	UL	America	FCC part 15
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547
EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547			
Strobe Test Standard	IEEE 1789			
OTHERS	Gross weight[G.W]	285g±10g		
	Dimensions	293×42.5×30mm[L×W×H]		
	Package size	296×44×33mm[L×W×H]		
	Carton Size	315×230×215mm[L×W×H] 30pcs/ctn 9.35kg±5%/ctn		

* The driver is suitable for connecting resistor current-limiting LED fixture [e.g. LED strip]. The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection [hiccups flickering]. When you order, please remark controlling the constant current LED fixture [e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.], so that we can prepare them with special procedures.


Product Size

Unit: mm

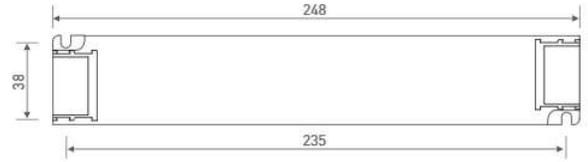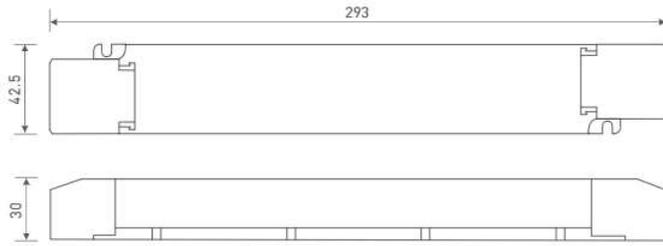


Wiring Diagram

DMX/RDM Connection

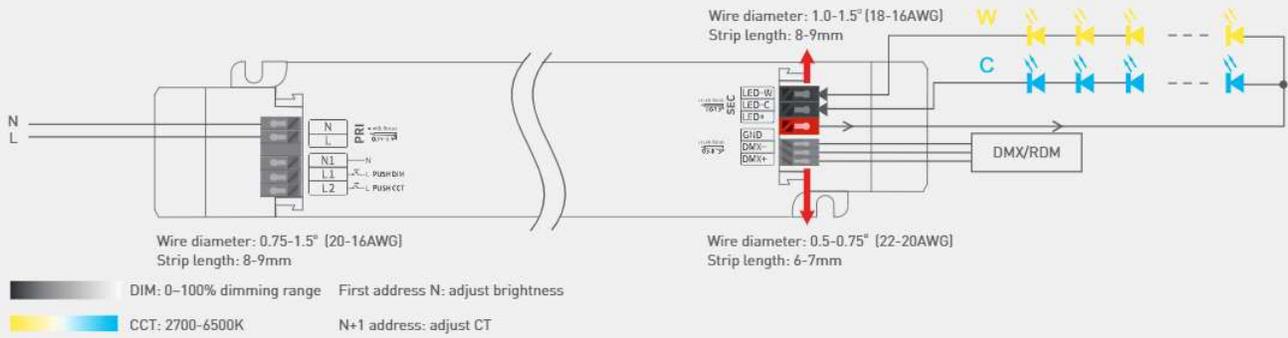

Push DIM/CCT Connection

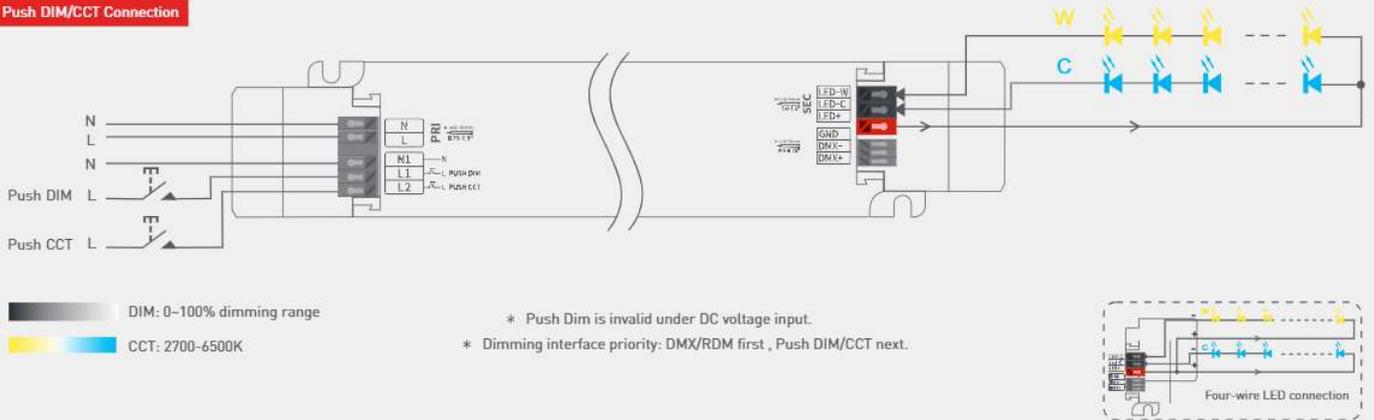

* Adopt constant power program design and it keeps the same brightness in color temperature adjustment.
Twice the rated power load can be connected to the driver. A 60W driver can connect to 60W X 2CH load and the total power of the 2 channels will be kept within 60W.

Push DIM/CCT



Reset switch

DIM

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the brightness level goes to the opposite direction.
- Dimming memory: Go to the brightness level adjusted previously when lights are turned on.

CCT

- Color temperature adjustment: Long press.
- With every other long press, color temperature go to the opposite direction.
- Color temperature memory: Color temperature will be the same as previously adjusted when lights are turned on.

Protective Housing Application Diagram


Tension plate



Push the tension plate down to fix the electric wires.


Push the side plate outwards and remove the tension plate by prying it up with a tool at the same time.

Remove the protective housing

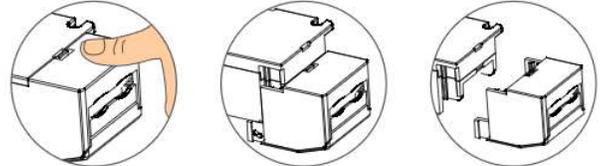


Pull the housing left and right from the bottom to remove it.

Installation Precautions

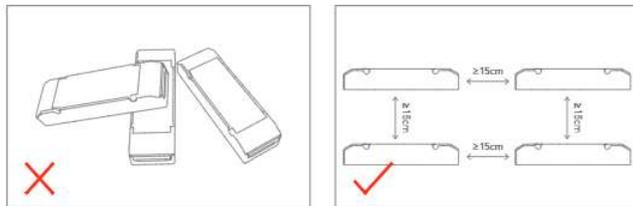

Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.

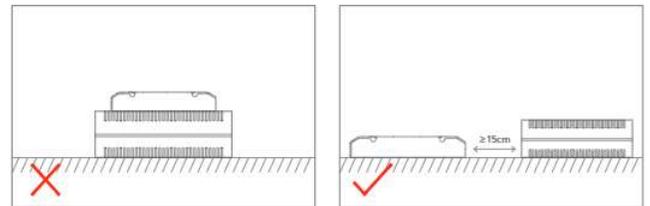


Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.

DMX Address Setting

The DMX driver can work with the address editor that complies with standard RDM protocol.


It is recommended to use LTECH's RDM editor (model WiFi-RDM01), which can achieve more functions such as remote browsing and parameter setting. Wiring diagram as below:

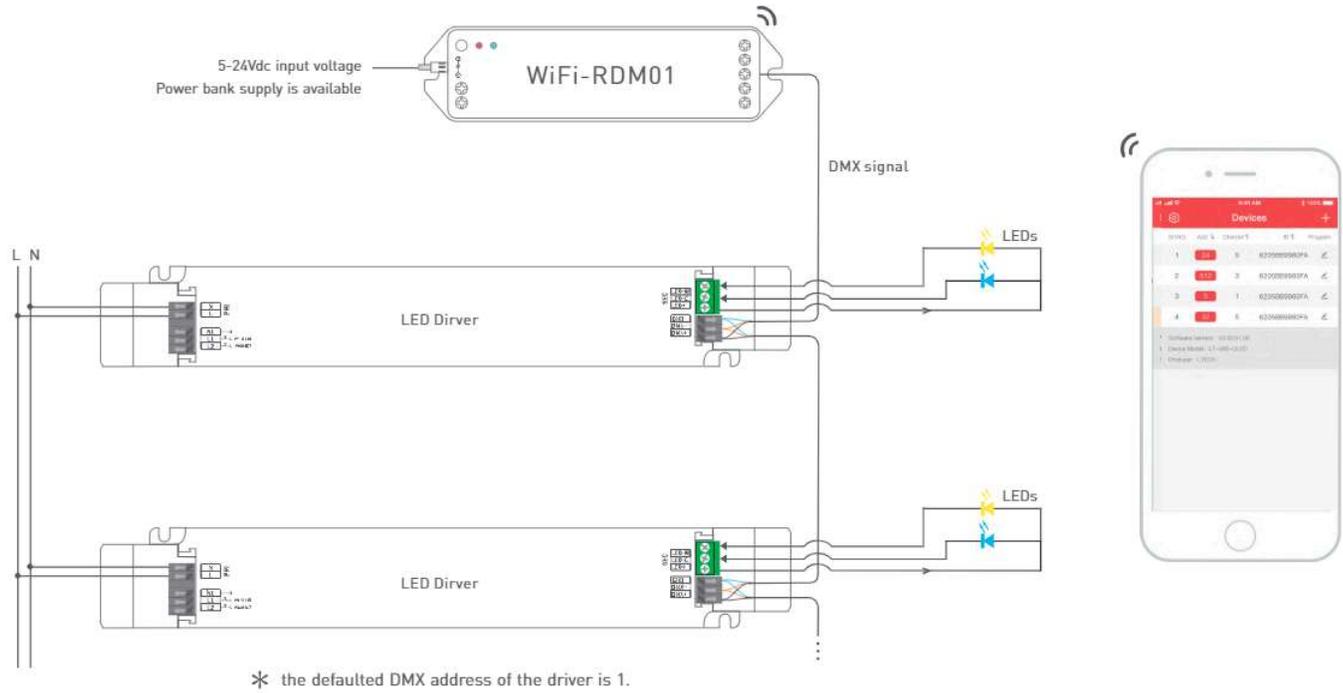


Mobile App Interface for the RDM Programmer

Download the App with your mobile phone and connect the RDM Programmer successfully, then you are allowed to set parameters through the APP. Please refer to the WiFi-RDM01 manual for more details.


- At the homepage, click "Add" of the device you are going to operate to edit the address, as shown below in the interface.
- Click "ID" to get more details for devices.
- Click "No" to issue an recognizing command.
- Click "⊙" in the upper left corner to access the settings which allows you to test, edit DMX addresses.

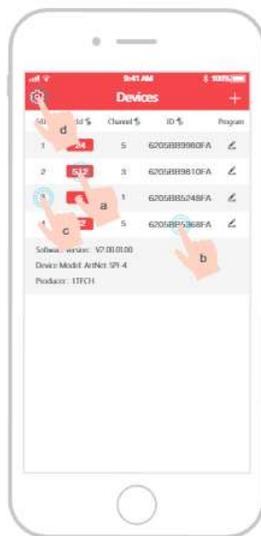

Home page




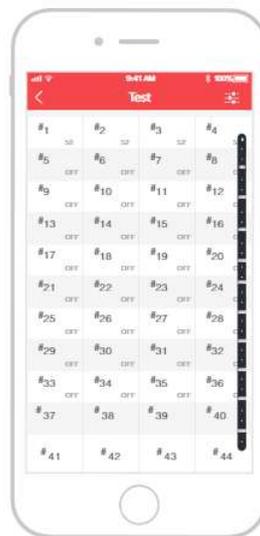


Test




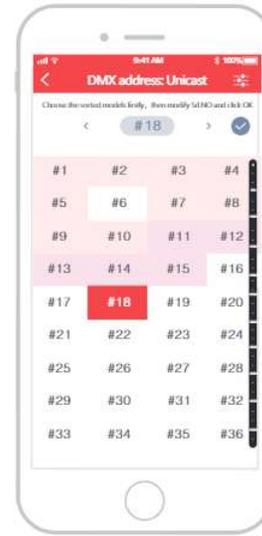


DMX address setting

Relationship Diagrams

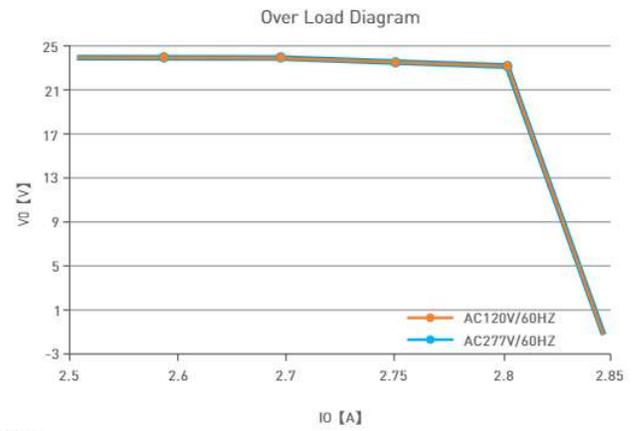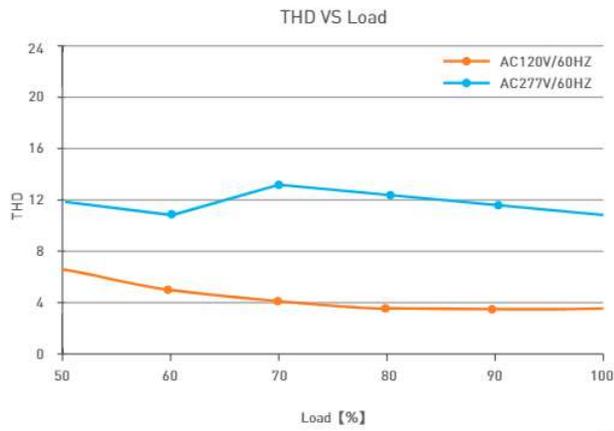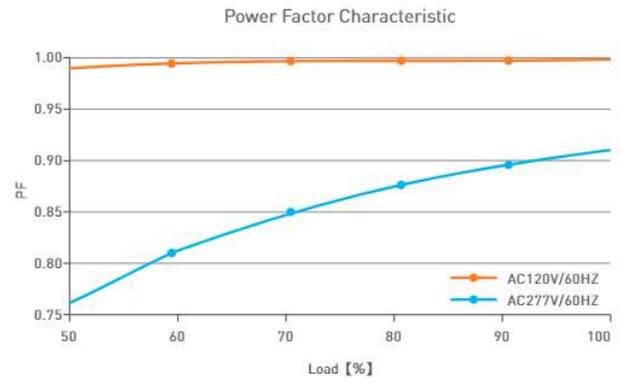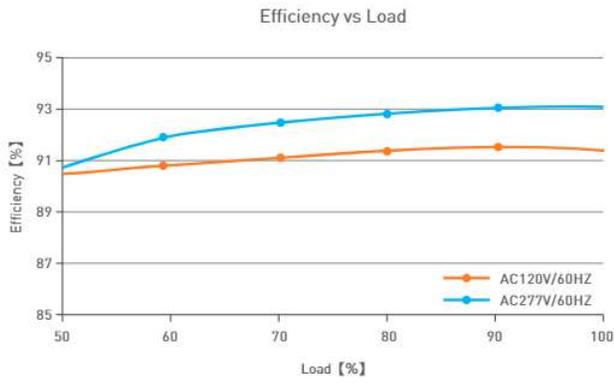

LM-60-24-U2M2

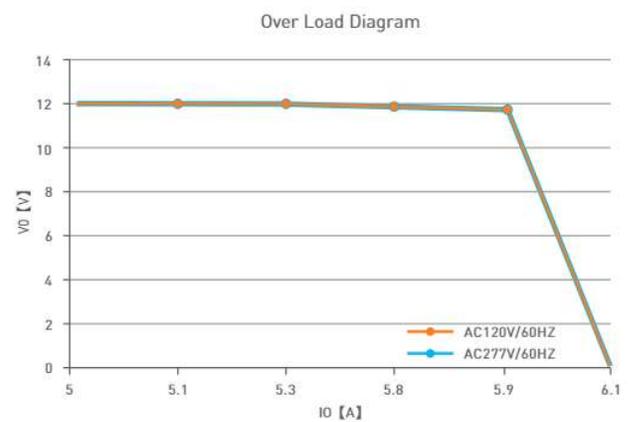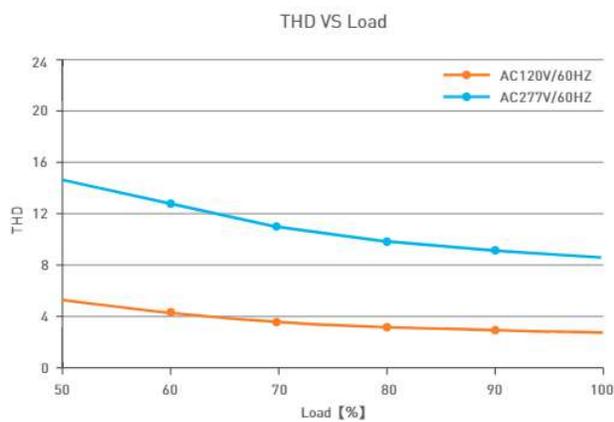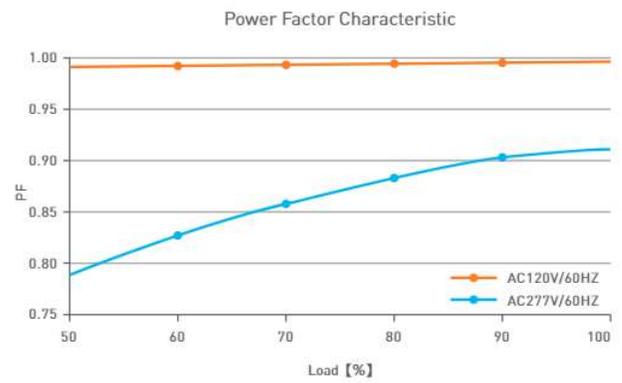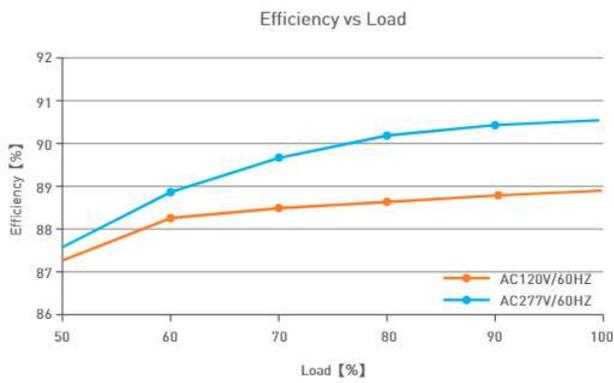

LM-60-12-U2M2


Flicker Test Table

IEEE 1789

Limit Value of Modulation in Low Risk Areas	
Waveform frequency of Optical output (f)	Limit value (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit Value of Modulation in No Effect Areas	
Waveform frequency of Optical output (f)	Limit value (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1%
- ◆ 1%
- ▲ 5%
- ◆ 10%
- 20%
- ▲ 30%
- 40%
- ★ 50%
- 60%
- 70%
- 80%
- ★ 90%
- ◆ 100%

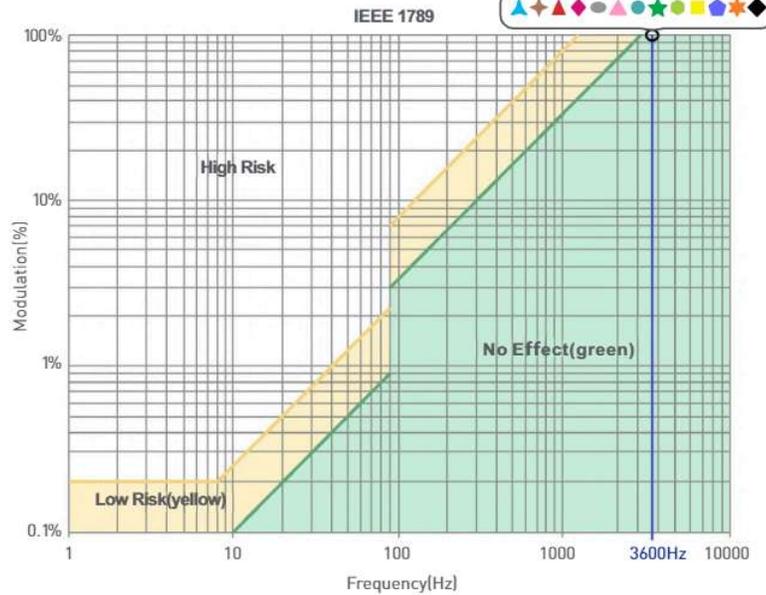

Marks in the right chart are tested results of different current levels. The output frequency is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Attentions

- Products shall be installed by qualified professionals.
 - LTECH products are non-waterproof [special models excepted]. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
 - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
 - Please check if the working voltage used complies with the parameter requirements of products.
 - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
 - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
 - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- * This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A1	2021.12.10	Update product silk screen	Liu Weili