LTECH

F1 F2 F3 F4

2.4GHz

2.4GHz RF Remote

- 12 keys remote control.
- RF 2.4GHz wireless signal.
- Work with F4-3A/F4-5A/F4-CC wireless drivers to control LED fixtures.
- EX series touch panel optional.

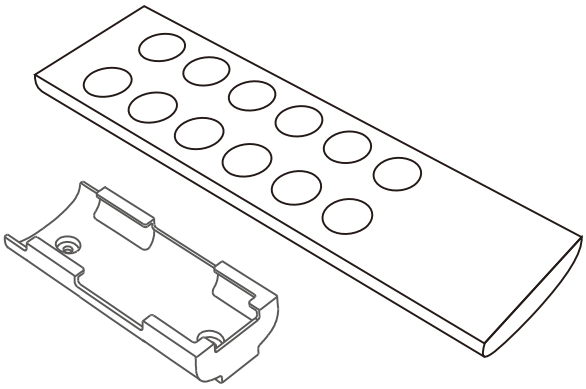

warranty 5 years

ISO9001:2008

Main Characteristics

Model	F1	F2	F3	F4
Remote Option	Dimming	Color temperature	RGB	RGBW
Working Voltage	3Vdc (Battery CR2032)			
Wireless Frequency	2.4GHz			
Working Temperature	-20℃~55℃			
Dimensions	L145×W40×H12(mm)			
Package Size	L150×W46×H18(mm)			
Weight(G.W.)	85g			

Operating Instruction for Remote

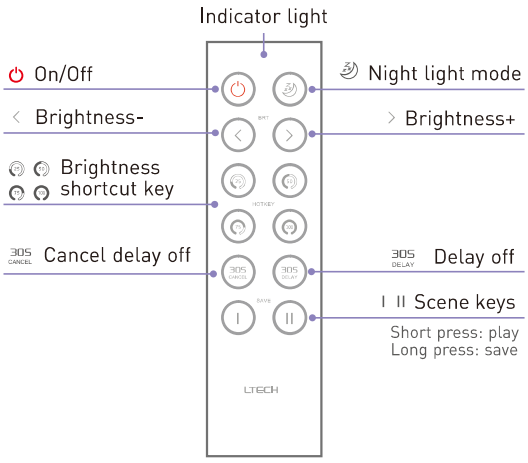

F1

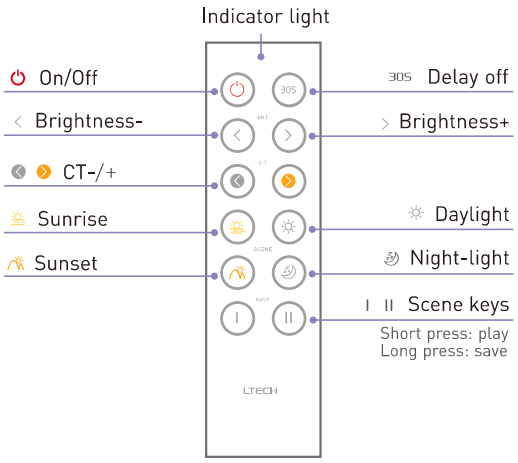

F2

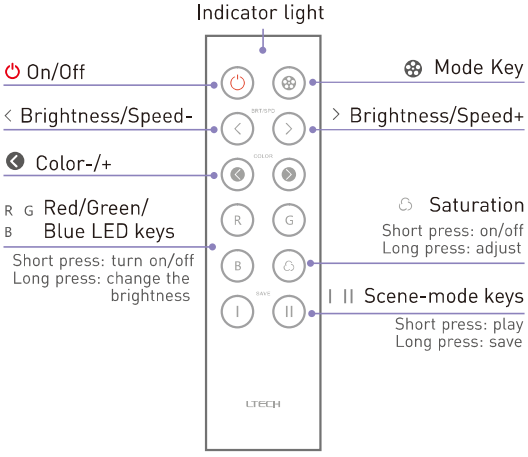

Mode
1. Static Red
2. Static Green
3. Static Blue
4. Static Yellow
5. Static Purple
6. Static Cyan
7. Static White
8.. RGB jumping
9. 7 Colors jumping
10. RGB smooth
11. 7 Colors smooth

F3

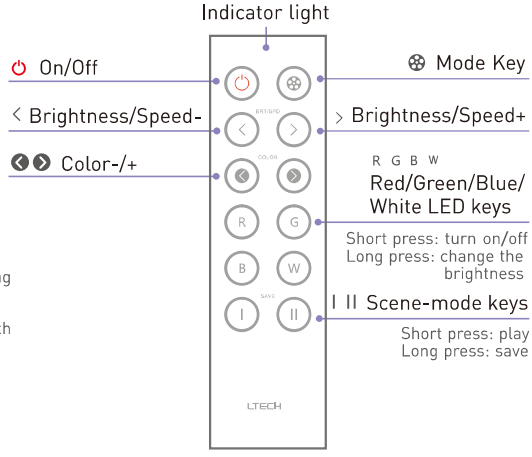

Mode
1. Static Red
2. Static Green
3. Static Blue
4. Static Yellow
5. Static Purple
6. Static Cyan
7. Static White
8.. RGB jumping
9. 7 Colors jumping
10. RGB smooth
11. 7 Colors smooth
12. Static Black (only turn off RGB)

F4

Wiring Diagram

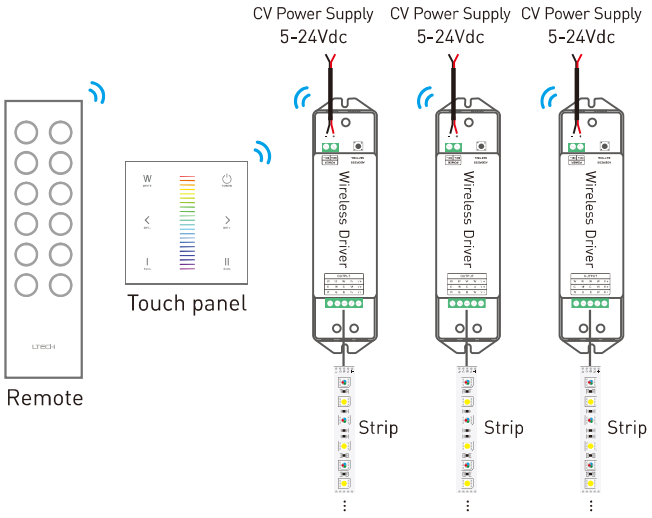

Dimensions

Unit : mm

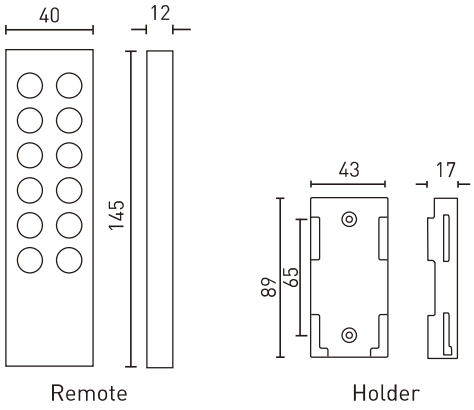

F series remote can control wireless driver directly, please refer to the manual of wireless driver for match code method.

F series remote can work with EX series touch panel, please refer to the manual of touch panel for match code method.

Match/Clear code between remotes

1. Assuming that B match up with A. Short press the bottom two keys of B simultaneously, the indicator light keeps on after release.



2. Then press any key on A in 5 seconds. When the indicator light of B turns off, match successfully.



Clear code

Press the bottom two keys of remote simultaneously (about 10 seconds) until the indicator light keeps on, deactivated the matching successfully.